


SMARTFLEX® 0.6

Light weight and flexible Polyurethane hose, flame retardant

Applications	wood dust extraction, dust extraction, grass extraction, leaf extraction, furniture production
Structure	TPU / Polyether-Polyurethane, uncolored, clear, steel wire / spring steel wire / not coated / copper plated
Temperature	-40°C up to 100°C, short term up to 125°C
Properties	flame-retardant, permanently antistatic ($R < 10^9 \text{ Ohm}$), hydrolysis- & microbe resistance, very good flexibility, good oil & petrol resistance
Norms	flame-retardant according to DIN 4102 / B1, TRBS 2153/ TRGS 727, ATEX 2014/34/EU / pneumatic transport of combustible dusts (inside: zone 20, 21, 22), discharge capability according to BGI 739-2 with spiral earthing

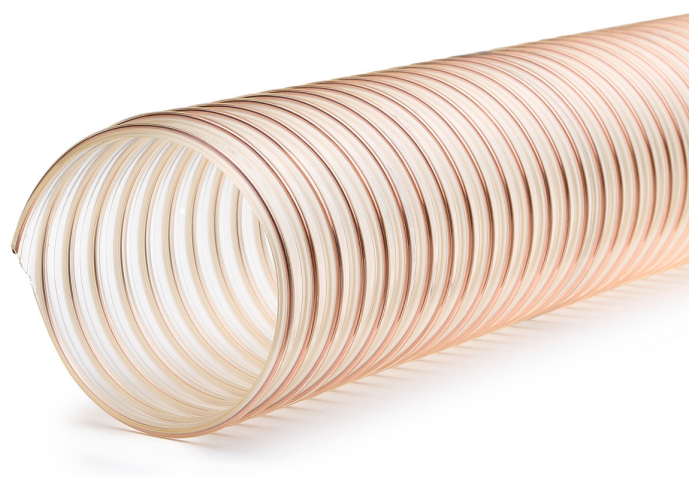

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
20	24	0,50	12	1,80	0,45	1,97	15	13500020-1500-000-00
20	24	0,50	12	1,80	0,45	1,32	10	13500020-1000-000-00
25	29	0,50	15	1,70	0,45	1,62	10	13500025-1000-000-00
25	29	0,50	15	1,70	0,45	2,43	15	13500025-1500-000-00
30	34	0,50	18	1,50	0,35	2,25	10	13500030-1000-000-00
30	34	0,50	18	1,50	0,35	3,38	15	13500030-1500-000-00
32	36	0,50	19	1,60	0,42	2,39	10	13500032-1000-000-00
32	36	0,50	19	1,60	0,42	3,59	15	13500032-1500-000-00
35	39	0,50	20	1,55	0,41	2,61	10	13500035-1000-000-00
35	39	0,50	20	1,55	0,41	3,91	15	13500035-1500-000-00
38	42	0,50	22	1,50	0,40	2,82	10	13500038-1000-000-00
38	42	0,50	22	1,50	0,40	4,23	15	13500038-1500-000-00
40	44	0,50	24	1,40	0,30	2,85	10	13500040-1000-000-00
40	44	0,50	24	1,40	0,30	4,27	15	13500040-1500-000-00
50	55	0,60	30	1,30	0,26	3,29	10	13500050-1000-000-00
50	55	0,60	30	1,30	0,26	4,94	15	13500050-1500-000-00
60	65	0,60	36	1,10	0,25	4,68	10	13500060-1000-000-00
60	65	0,60	36	1,10	0,25	7,02	15	13500060-1500-000-00
65	70	0,60	38	1,00	0,23	6,04	10	13500065-1000-000-00
65	70	0,60	38	1,00	0,23	9,06	15	13500065-1500-000-00

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
70	75	0,60	40	1,00	0,25	5,41	10	13500070-1000-000-00
70	75	0,60	40	1,00	0,25	8,11	15	13500070-1500-000-00
75	80	0,60	45	0,80	0,20	5,77	10	13500075-1000-000-00
75	80	0,60	45	0,80	0,20	8,65	15	13500075-1500-000-00
80	85	0,60	48	0,70	0,18	6,13	10	13500080-1000-000-00
80	85	0,60	48	0,70	0,18	9,20	15	13500080-1500-000-00
90	95	0,60	54	0,70	0,16	6,13	10	13500090-1000-000-00
90	95	0,60	54	0,70	0,16	9,20	15	13500090-1500-000-00
100	105	0,60	60	0,60	0,15	5,68	10	13500100-1000-000-00
100	105	0,60	60	0,60	0,15	8,52	15	13500100-1500-000-00
110	115	0,60	66	0,50	0,14	9,35	15	13500110-1500-000-00
110	115	0,60	66	0,50	0,14	6,24	10	13500110-1000-000-00
115	120	0,60	69	0,48	0,14	6,51	10	13500115-1000-000-00
115	120	0,60	69	0,48	0,14	9,77	15	13500115-1500-000-00
120	125	0,60	72	0,45	0,14	6,79	10	13500120-1000-000-00
120	125	0,60	72	0,45	0,14	10,19	15	13500120-1500-000-00
125	130	0,60	75	0,40	0,12	7,08	10	13500125-1000-000-00
125	130	0,60	75	0,40	0,12	10,61	15	13500125-1500-000-00
130	135	0,60	80	0,35	0,12	7,36	10	13500130-1000-000-00
130	135	0,60	80	0,35	0,12	11,04	15	13500130-1500-000-00
140	145	0,60	84	0,30	0,12	7,93	10	13500140-1000-000-00
140	145	0,60	84	0,30	0,12	11,89	15	13500140-1500-000-00
150	155	0,60	90	0,25	0,10	8,49	10	13500150-1000-000-00
150	155	0,60	90	0,25	0,10	12,74	15	13500150-1500-000-00
160	166	0,60	96	0,22	0,10	10,26	10	13500160-1000-000-00
160	166	0,60	96	0,22	0,10	15,39	15	13500160-1500-000-00
175	181	0,60	103	0,20	0,10	11,20	10	13500175-1000-000-00
175	181	0,60	103	0,20	0,10	16,81	15	13500175-1500-000-00
180	186	0,60	108	0,20	0,10	11,52	10	13500180-1000-000-00
180	186	0,60	108	0,20	0,10	17,28	15	13500180-1500-000-00
200	206	0,60	120	0,20	0,09	12,79	10	13500200-1000-000-00
200	206	0,60	120	0,20	0,09	19,18	15	13500200-1500-000-00
215	221	0,60	130	0,18	0,08	13,73	10	13500215-1000-000-00
215	221	0,60	130	0,18	0,08	20,60	15	13500215-1500-000-00
225	231	0,60	135	0,15	0,08	14,37	10	13500225-1000-000-00
225	231	0,60	135	0,15	0,08	21,55	15	13500225-1500-000-00
250	257	0,60	150	0,15	0,06	18,49	10	13500250-1000-000-00
250	257	0,60	150	0,15	0,06	27,74	15	13500250-1500-000-00
254	261	0,60	158	0,15	0,06	28,18	15	13500254-1500-000-00
254	261	0,60	158	0,15	0,06	18,79	10	13500254-1000-000-00
280	287	0,60	170	0,13	0,06	20,69	10	13500280-1000-000-00
300	307	0,60	180	0,12	0,06	22,15	10	13500300-1000-000-00

Inner Diameter (mm)	Outer Diameter (mm)	Wall Thickness (mm)	Bending Radius (mm)	Max. Operating Pressure (bar)	Vacuum Max. (bar)	Total Weight per Piece (kg)	Length (m)	Article Number
315	322	0,60	185	0,11	0,05	23,25	10	13500315-1000-000-00
325	332	0,60	195	0,10	0,04	23,99	10	13500325-1000-000-00
350	357	0,60	210	0,10	0,04	25,82	10	13500350-1000-000-00
400	407	0,60	240	0,08	0,02	29,48	10	13500400-1000-000-00
450	457	0,60	270	0,04	0,01	33,14	10	13500450-1000-000-00
500	507	0,60	300	0,02	0,01	36,81	10	13500500-1000-000-00